


Combination strapping tools

Combination tools function as tensioners, sealers and cutters. They save time by eliminating the handling of separate tools. But because they weigh more than such tools, they should be placed as close as possible to the position where they will be used. Seal-feed combination tools carry a stack of seals in a magazine for fast, easy loading.

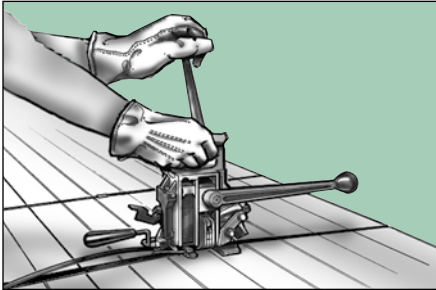

Pneumatic Tension-Weld®

The model VFX-9/13 combination tool applies Contrax, Dymax and Tenax strapping. Strap ends are joined with Signode's friction-weld process, eliminating the need for metal seals.

The VTI-16, VTI-19 and VTI-25 pneumatic friction welding tools are used in baling applications.

The lightweight VT-16HD, VT-19HD, VT-25HD and VT-32HD tools apply High-Strength Tenax strapping at higher tension levels. Ideal for use in both horizontal and vertical applications.


Manual

The AST manual seal-feed combination tool uses Contrax, Dymax and Tenax strapping.

The AMT-58 is the ideal tool for High-Strength Tenax strapping.

High-Strength Tenax strapping tools

| Model | Part Number | Strapping | Seal | Joint Type | Applied Tension | Description | Shipping Weight | |
|----------|-------------|---------------------------------------|--------|--------------|-----------------|-------------|-----------------|-----|
| | | | | | | | lbs | kg |
| AMT-58 | 306930 | High-Strength Tenax 2030, 2040 | 58 AMT | Crimp | 400 lbs | Manual | 14 | 6.4 |
| VT-Brick | 424765 | High-Strength Tenax 2030, 2038B | None | Tension-Weld | 600 lbs | Pneumatic | 10.5 | 4.8 |
| VTI-16 | 427110 | High-Strength Tenax 2030, 2040 | | | — | Pneumatic | 6 | 2.7 |
| VTI-19 | 427993 | High-Strength Tenax 2220, 2225 | | | 800 lbs | Pneumatic | 10.5 | 4.8 |
| VTI-25 | 427988 | High-Strength Tenax 2480, 10050 | | | | | | |
| VT-16HD | 427280 | High-Strength Tenax 2030, 2040, 2040H | | | 800 lbs | Pneumatic | 11.5 | 5.0 |
| VT-19HD | 426160 | High-Strength Tenax 2220, 2225 | | | | | | |
| VT-25HD | 423992 | High-Strength Tenax 2480, 10050 | | | | | | |
| VT-32HD | 428225 | High-Strength Tenax 2625, 2680 | | | | | | |

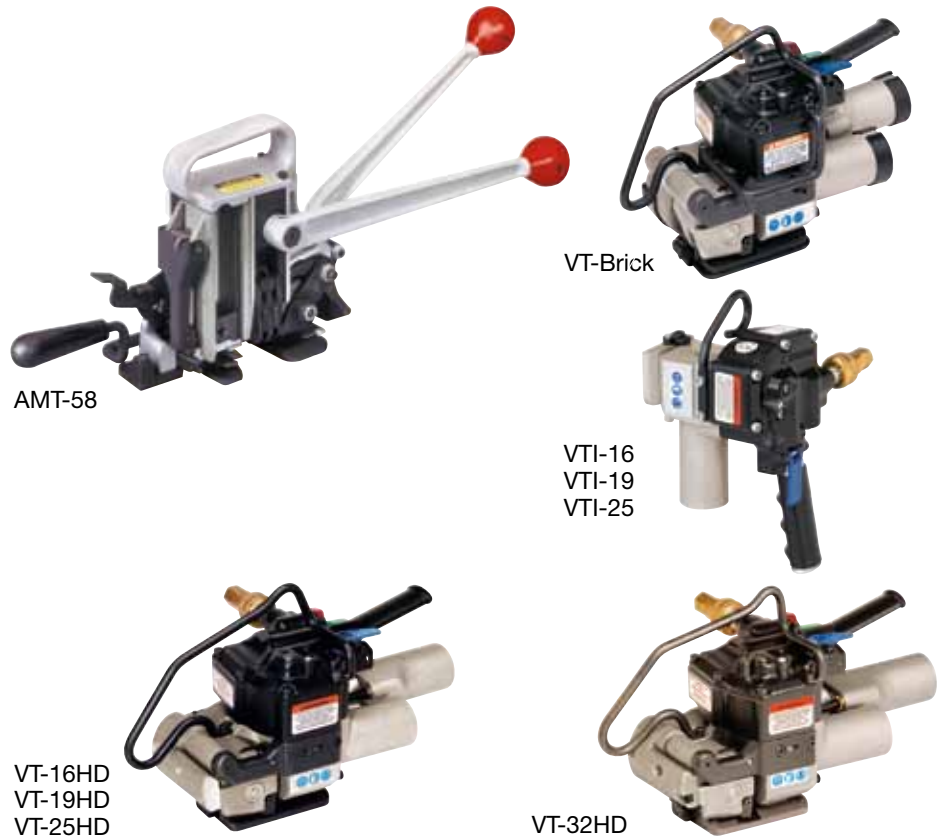

| Model | Part Number | Strap Type | | | Seal | Joint Type | Description | Shipping Weight | |
|----------|-------------|------------------------------|--------------------------------------|------------------------------|-------|---------------|-------------|-----------------|-----|
| | | Dymax | Contrax | Tenax | | | | lbs | kg |
| AST | 422950 | 502, 504, 506, 508 | 814, 816, 818 | 1816, 1818, 1822 | 50ASD | Crimp | Manual | 11.5 | 5.2 |
| VFX-9/13 | 429276 | 302, 304, 306, 502, 504, 506 | HD719, HD723, HD729, HG723, 816, 818 | 1716, 1718, 1816, 1818, 1822 | None | Friction-Weld | Pneumatic | 5 | 2.3 |

